Easy USB Connectivity

HS201/HX300

Now watch your favourite movies (DivX), listen to music (MP3) and view images (jpeg) just by inserting USB memory directly into the projector.



Easy File Viewer

HX300

File viewer function enables user to show ppt or excel file by simply inserting USB memory to HX300 without converting the original file.





Auto Colour Adjustment

DX630

LG DX630 automatically controls the R/G/B Gain by sensing the colour of the wall with its built-in camera.

Built-in camera detects wall colour and deliver the original colour of the source.



Screen | Auto Color ADJ | Original Colour



Quick Power On/Off

AF115*/AH215*/BX501B/DX630

User can save the waiting time before and after the usage.



Expert Colour Management

AH215*/DX630/BX501B

This function allows the users to separately control the Gain (contrast), saturation, and the colour tone of red, green, blue, cyan, magenta and yellow.

*Coming Soon





Ahmedabad: +91-9978800010, **Aurangabad:** +91-9545501437, **Bangalore/Hubli:** +91-9986507607, **Bhubaneswar:** +91-09937099013, **Kolkata/Asansol:** +91-9830194360, **Chandigarh:** +91-9888077775, **Chennai:** +91-09962560050, **Coimbatore:** +91-9047067111, **Cochin:** +91-9846299709, **Gurgaon:** +91-9811354774, **Delhi:** +91-9873338736, **Ghaziabad:** +91-9811354710, **Dehradun:** +91-9711733172, **Guwahati:** +91-9854051311, **Hyderabad/Warangal:** +91-9985487409, **Vijaywada:** +91-9703918985, **Bhopal:** +91-9826620039, **Indore:** +91-9909920696, **Jaipur:** +91-9828503011, **Jodhpur:** +91-9549655653, **Jammu:** +91-9419135806, **Lucknow/Varanasi:** +91-9839801599, **Mumbai:** +91-9820139736, **Raipur:** +91-9926437000, **Nagpur:** +91-9923399410, **Patna/Ranchi:** +91-9709001354, **Pune/Goa:** +91-9049003483, **Surat:** +91-9825612078.

*External Battery is optional. Recommended projection: 60 inch @1.6m

24 x 7 CALL CENTER OPERATIONS

CALL **1800-180-9999** (Toll Free) SMS **5757554** (Send SMS) CLICK **www.lgindia.com** **lgservice@lgindia.com**

To know more about LG, visit www.lgindia.com
For Corporate/Institutional enquiries, please write to enquiries@lgindia.com

Regd. Office: LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar, Surajpur Kasna Road, Greater Noida-201 306, U.P.

As a continuing policy of product development of LG Electronics, the design and specifications are subject may vary from model to model. Colour/shades may vary due to printing restrictions. E.&O.E.







THE FUTURE LOOKS BRIGHT

Presenting the most stylish, ultra-portable LED Palm Projector.



www.lgindia.com


Key Features



Full HD

AF115*

With the ultra high-definition at 1920 × 1080p and 2 Megapixel, get 2 times clearer picture compared with HD and 3 times better picture than SD.

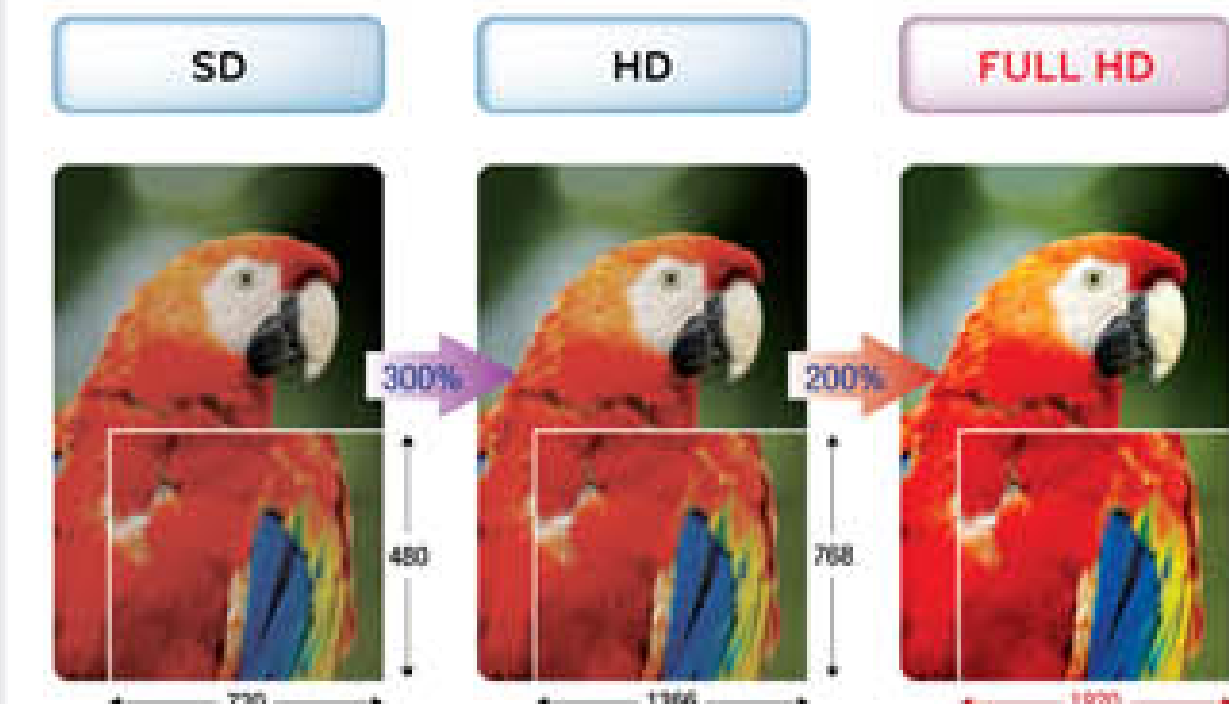




VIDI™ Technology

AH215*/BX501B

For front projection projectors, brightness is essential for a powerful data presentation. Also, natural and life-like colours are just as important for playing video games or watching sports.

PHILIPS VIDI™ technology enhances video performance DLP in terms of colour expression, gamma & dithering noise, and offers vivid picture quality without colour distortion. It enables you to have an impressive presentation too.

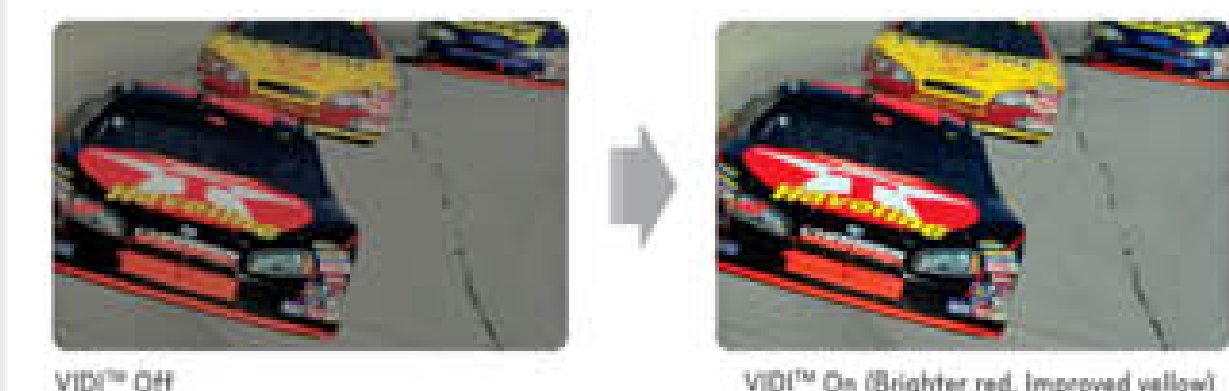


VIDI™ Off | VIDI™ On (Brighter red, Improved yellow)



Brilliant Color™

All Models (Except AF115*)

Brilliant Color™ Technology provides increased brightness in non-primary colours and boosts overall color intensity by amplifying mid-tone colour.

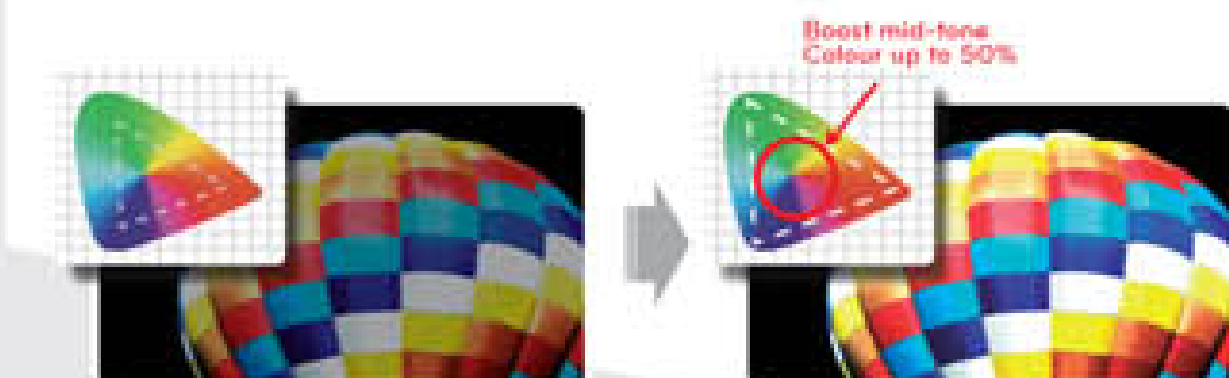

*Coming Soon

Projector Leaflet Outside

LED Projector
Business Projector
Home Cinema

Specification

Model		HX300	HS201G	BX501B	BX401C	DX630	BX324	BX254	BS254	BX275	BS275	AF115	AH215
Projection System		DLP	DLP	DLP	DLP	DLP	DLP	DLP	DLP	DLP	DLP	LCOS	DLP
Native Resolution		XGA(1024x768)	SVGA(800x600)	XGA(1024x768)	XGA(1024x768)	XGA(1024x768)	XGA(1024x768)	XGA(1024x768)	SVGA(800x600)	XGA(1024x768)	SVGA(800x600)	1080p(1920x1080)	720p(1280x720)
Brightness(ANSI)		270	200	5000	4000	3000	3200	2500	2500	2700	2700	1500	1800
Contrast Ratio(FOFO)		2000:1	2000:1	2800:1	2800:1	2300:1	2100:1	2100:1	2100:1	2200:1	2200:1	30000:1	2500:1
Noise	High Brightness	28dB	29dB(Normal), 35dB(PT mode)	35dB	34dB	30dB	39dB	33dB	33dB	36dB	36dB	25dB	27dB
	Economic	23dB	23dB	33dB	32dB	25dB	33dB	31dB	31dB	32dB	32dB	21dB	23dB
Colour Wheel		-	-	6 segment (RGBWYC)	6 segment (RGBWYC)	4 segment (RGBW)	5 segment (RYGWB)	5 segment (RGBWY)	5 segment (RGBWY)	6 segment (RGBWYC)	6 segment (RGBWYC)	-	7 segment (RGBWRGB)
Projection Lens	Focus	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Maunal	Manual	Manual	Manual
	Zoom	Fixed	Fixed	Manual 1.2x	Manual 1.2x	Manual 1.17x	Manual 1.1x	Manual 1.17x	Manual 1.17x	Manual 1.1x	Manual 1.1x	Manual 1.8x	Manual 1.16x
Projection Image	Standard	40"@1.1m	40"@1.2m	100"@3.2m	100"@3.2m	100"@3.9m	51"@2m	51"@2m	51"@2m	100"@ 3.96m	100"@ 3.96m	60"@1.8m	100"@4.1m
	Throw Ratio	1.35	1.35	1.57/1.87	1.57/1.87	1.94/2.74	1.92/2.14	1.93/2.16	1.93/2.16	1.95/2.15	1.95/2.15	1.36/2.46	1.8/2.1
Lamp	Type	LED RGB	LED RGB	330W	300W	230W	240W	180W	180W	180W	180W	220W	220W
	Life High Brightness	30,000 Hrs	30,000 Hrs	2000 Hrs	2000 Hrs	2000 Hrs	2000 Hrs	2000 Hrs	2000 Hrs	3500 Hrs	3500 Hrs	3000 Hrs	3000 Hrs
	Life Economic	-		2500 Hrs	2500 Hrs	3000 Hrs	3500 Hrs	3000 Hrs	3000 Hrs	4000 Hrs	4000 Hrs	3500 Hrs	4000 Hrs
General Specification													
Aspect Ratio Control		Native 4:3, Support 16:9	4:3,Just Scan,Set By Program, 16:9, Zoom, Cinema Zoom	Native 4:3, Support 16:9	Native 4:3, Support 16:9	Native 4:3, Support 16:9	Fill, 4:3,16:9, Letter Box, Native	Native 4:3, Support 16:9	Native 4:3, Support 16:9	Native 4:3, Support 16:9	4:3/16:9I/16:9II/ Native/Auto	Auto, 16:9, 4:3, Cinema Zoom, Just Scan	Native 16:9, Support 4:3
Sound		1W+1W stereo	1W+1W stereo	-	-	-	1.5W Mono	1.5W Mono	1.5W Mono	2W Mono	2W Mono	-	-
Dimension (mm)		160X135.5X139.2	183X122 X 60	346x263x109	346x263x109	302x271x95	260.9X186.4X71.36	260.9x186.4x71.3	260.9x186.4x71.3	287X192X88	286.3X192X88	366X447.5X173	302x271x95
Weight (Kg)		780g	800g	4.8Kg	4.5Kg	3.4Kg	1.9Kg	1.9Kg	1.9Kg	2.31Kg	2.31Kg	9.7Kg	3.4Kg
Power Consumption		100W max / STBY 1W under	80W / STBY 1W under	415W / STBY 5W, under	350W / STBY 5W Under	290W / STBY 5W under	300W	230W	230W	260W	260W	300W / STBY 1W under	280W / STBY 5W under
Power Supply		AC DC Adaptor / 100 ~ 240 Hz, 50/60Hz	AC DC Adaptor / 100 ~ 240 Hz, 50/60Hz	AC 220V(ONLY), 50Hz/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz	AC 100~240V / 50/60Hz
Input Signal Compatibility	Digital (DVI, HDMI)	1080p/1080i/720p/ 576p/480p	1080p/1080i/720p/ 576p/480p	1080i/720p/ 576p/480p	1080p/1080i/720p/ 576p/480p	1080p/1080i/720p/ 576p/480p	-	-	-	-	-	Up to 1080p(60Hz/50Hz/24Hz)	Up to 1080p(60Hz/50Hz/24Hz)
	RGB	Up to WSXGA+ (1680x1050@60Hz)	Up to WSXGA+ (1680x1050@60Hz)	Up to SXGA+ (1400X1050@60Hz)	Up to SXGA+ (1400X1050@60Hz)	Up to SXGA+ 1400x1050@60 Hz	Up to SXGA 1280x1024@75 Hz	Up to SXGA 1280x1024@75 Hz	Up to SXGA 1280x1024@75 Hz	Up to UXGA (1680x1050@60Hz)	Up to UXGA 1600x1200@60Hz	Up to UXGA(1600x1200, 60Hz), 1080p	Up to SXGA+ (1400X1050@75Hz)
	Component Video	1080p/1080i/720p/ 576p/576i/480p/480i	1080p/1080i/720p/576p/57 6i/480p/480i	1080i/720p/576P/576i/ 480p/480i	1080P/1080i/720p/576p/57 6i/480p/480i	1080i/720p/576p/576i/ 480p/480i	1080i/720p/576p/576i/ 480p/480i	1080i/720p/576p/576i/ 480p/480i	1080i/720p/576p/576i/ 480p/480i	1080p/1080i/720p/ 576p/576i/480p/480i	1080i/720p/576p/576i/ 480p/480i	1080i/p/720p/576i/576p/ 480i/480p	1080p/1080i/720p/576p/ 576i/480p/480i
	Composite Video	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/ PAL/PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/PAL/ PAL-M/PAL-N/SECAM	NTSC-M/NTSC 4.43/PAL/ PAL-M/PAL-N/SECAM
Input/Output Terminals													
HDMI		✓	✓	✓	✓	✓	NA	NA	NA	NA	NA	✓	✓
RGB In		✓	✓	(2EA)	(2EA)	✓	✓	✓	✓	(2EA)	✓	✓	✓
RGB Out		✓	NA	✓	✓	✓	NA	NA	NA	✓	✓	NA	NA
Audio In		✓	✓	NA	NA	NA	(Mini Jack)	(Mini Jack)	(Mini Jack)	(Mini Jack)	(Mini Jack)	NA	NA
Audio Out		✓	✓	NA	✓	NA	NA	NA	NA	NA	NA	NA	NA
Composite		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Component		✓	✓	Through RGB	Through RGB	✓	NA	NA	NA	NA	NA	✓	✓
USB		Type A	Type A	SVC	SVC	SVC	NA	NA	NA	NA	NA	TypeB/SVC	SVC
RS232C		NA	NA	✓	✓	(Mini 8pin)	✓	✓	✓	✓	✓	NA	NA
RJ45		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Features													
Digital Keystone Correction		(Vertical)	✓	✓	✓	(Vertical)	✓	✓	✓	(Vertical)	✓	Advanced keystone	(Vertical)
Auto Source Detection		✓	✓	NA	✓	NA	✓	✓	✓	NA	✓	NA	NA
Quick Power On/Off		✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	✓	✓
Auto Sleep		✓	✓	✓	✓	✓	NA	NA	NA	NA	NA	✓	✓
Sleep Time		✓	NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Colour Temperature		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Auto Colour ADJ		NA	NA	NA	NA	✓	NA	NA	NA	NA	NA	NA	NA
Intelligent Sensor		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	✓
Presentation Timer		NA	NA	✓	✓	✓	✓	✓	✓	NA	NA	NA	✓
Lens Shift		NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	(Verical)	✓
Brilliant Color™		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	✓
White Enhance (white peaking)		NA	NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black Level Control		✓	✓	NA	NA	NA	NA	NA	NA	NA	NA	✓	NA
Expert Control		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Gamma Correction		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Noise Reduction		✓	✓	NA	NA	NA	✓	✓	✓	✓	✓	✓	NA
FMTransmitter		✓	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
USB Control		✓	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Office File Viewer		✓	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Accessory													
Item		Carry Bag(option)/Ceiling Mount(Option)/D-sub 15/Rgb to Comp/Remote Control/External Battery(option)/Quick setup Guide/CD Manual	Carry Bag/Ceiling Mount(Option)/D-sub 15/Rgb to Comp/Remote Control/External Battery(option)/Quick setup Guide/CD Manual	D-Sub 15/RGB to Comp/CD Manual	D-Sub 15/RGB to Comp/CD Manual	Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Carry Bag/Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Carry Bag/Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Carry Bag/Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Carry Bag/Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual	Remote Control/CD Manual	Ceiling Mount/D-Sub 15/RGB to Comp/CD Manual